

Алматы (727)345-47-04
Ангарск (3955)60-70-56
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Благовещенск (4162)22-76-07
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Владикавказ (8672)28-90-48
Владимир (4922)49-43-18
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89

Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Коломна (4966)23-41-49
Кострома (4942)77-07-48
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Курган (3522)50-90-47
Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Ноябрьск (3496)41-32-12
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Петрозаводск (8142)55-98-37
Псков (8112)59-10-37
Пермь (342)205-81-47

Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Саранск (8342)22-96-24
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Сыктывкар (8212)25-95-17
Тамбов (4752)50-40-97
Тверь (4822)63-31-35

Тольятти (8482)63-91-07
Томск (3822)98-41-53
Тула (4872)33-79-87
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Улан-Удэ (3012)59-97-51
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Чебоксары (8352)28-53-07
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Чита (3022)38-34-83
Якутск (4112)23-90-97
Ярославль (4852)69-52-93

Россия +7(495)268-04-70

Казахстан +7(727)345-47-04

Беларусь +(375)257-127-884

Узбекистан +998(71)205-18-59

Киргизия +996(312)96-26-47

<https://cibo.nt-rt.ru/> || coh@nt-rt.ru







➤ **Finitube, the powerful and versatile finishing champion.**

There are many types of tube fabrication. Tight radius bends, wide sweeping curves or simple long lengths. Whatever the type of tube or pipe you need to finish, achieving a consistent high quality finish is always the challenge.

The new Finitube is an innovative and ingeniously designed tool for the easy finishing of tube and pipes. This is a trail-blazing concept. In the design, Cibo has combined the experience of the many regular and satisfied users of the first model with the know-how and expertise of Cibo engineers. The result: a harmonious marriage between user-friendliness, innovative design and industrial quality, guaranteeing a quick and perfect finish for any type of tube, cylinder or pipe construction.



> THE DETAILS

UNIQUE DRIVE

The directly driven arm on the driving motor is a remarkable technical improvement of the new Finitube. It is truly unique. This direct drive makes the connection between both parts extremely compact and stable. The abrasive belt is located in the extension of the machine and is perfectly aligned with the drive motor. As a result, the belt is very stable and runs smoothly over any tube or cylinder. Due to this unique design, the machine is very compact and easy to use.



BELT GUIDE

The new Finitube's 3 guide wheels immediately attract attention. Each wheel has its own design and technical properties. Each tread has its own pattern. The two runner wheels are wear-resistant and break-resistant and are equipped with specially designed lateral flanges. The rubber driving wheel comes with smart V-grooves. This unique concept gives the user many advantages. First of all, there is the incredibly flexible and stable belt tracking. The innovative guide wheels make it practically impossible for the machine's abrasive belt to slip off, irrespective of the machine's or user's position or complexity of the tube to be worked. The V-grooves ensure perfect traction without slipping and cool operation that considerably extends the lifespan of your abrasive belts.



EXTENSION ARM

The extension arm has an impact-proof foot. As a result, it is safe to place the machine on the floor even while the belt is turning, which increases user-friendliness. A protective stop has been mounted on the arm. This is the key to worry-free use of the machine, as it protects the workpieces against possible damage by the machine. The arm itself has been designed to be opened simply and quickly.






ROUND HANDLE

The unique round handle on the Finitube's top arm is extremely easy to operate, regardless of the operator's position. Due to the ingenious position of this round handle, less strength is required to close the arm completely. This allows the user to grip practically any tube, regardless of its diameter, to give it an optimal finish.



270°

With the most frequently used tube diameters, you have an immediate reach of no less than 270°, and with an extra movement, you can easily reach the full 360°.

**THE MULTI V-BELT**

The powerful 1200 Watt driving motor has a double gear transmission with an extremely high torque. In order to transmit this force to the abrasive belt, a practically indestructible Multi V-belt is used with a built-in slip clutch. Because this drive will slip before the machine reaches its highest torque point, it retains its ability to protect the motor and the operator.



➤ **Finitube**

FINITUBE SET

code	voltage	power	RPM	stock	
SMFTNA	220V	1200W	900-2.810	●	1
SMFTNB	110V	1200W	900-2.810	●	1

content	code	description	number
	–	Motor and FiniTube-arm	1
	VT/RC1/675X40	Reinforced Tex belt 675x40 RC1-Coarse	1
	VT/RC2/675X40	Reinforced Tex belt 675x40 RC2-Medium	2
	VT/RC3/675X40	Reinforced Tex belt 675x40 RC3-Fine	1
	JF4T/120/675X40	Abrasive belt 675x40 grit type 120	2
	JF4T/220/675X40	Abrasive belt 675x40 grit type 220	2
	JF4T/320/675X40	Abrasive belt 675x40 grit type 320	2
	237AA/30/675X40	Trizact™belt 675x40 grit type A30 (= grit type P600)	1
	237AA/45/675X40	Trizact™belt 675x40 grit type A45 (= grit type P400)	1
	T/AVFSOFT/170158	Tex sheet 170 x 158 AvfSoft-Very fine	4
	T/SUF1000/170158	Tex sheet 170 x 158 Suf1000-Ultra fine	4
	FORU/60	Rubber-bonded sanding block grit type 60	1
	SPIC	Inoxiclean spray can	1

+ delivered in a sturdy box

Trizact™ is a registered trademark of the 3M Company.

FINITUBE



● = available from stock

● = available in 5 working days

● = on request

>

Cloth belts

JF4T - A/O

dimensions	grit	code	stock	
675x40	60	JF4T/60/675x40B		10
	80	JF4T/80/675x40B		10
	180	JF4T/120/675x40B		10
	320	JF4T/150/675x40B		10
	220	JF4T/180/675x40B		10
	150	JF4T/220/675x40B		10
	120	JF4T/320/675x40B		10
	400	JF4T/400/675x40B		10



TZ59 - ZIRC.

dimensions	grit	code	stock	
675x40	40	TZ59/40/675x40B		10
	60	TZ59/60/675x40B		10
	80	TZ59/80/675x40B		10
	100	TZ59/100/675x40B		10
	120	TZ59/120/675x40B		10



237AA - TRIZACT™

dimensions	grit	code	stock	
675x40	A6 (P2000)	237AA/6/675x40B		10
	A16 (P1400)	237AA/16/675x40B		10
	A30 (P600)	237AA/30/675x40B		10
	A45 (P400)	237AA/45/675x40B		10
	A65 (P280)	237AA/65/675x40B		10
	A80 (P240)	237AA/80/675x40B		10
	A100 (P220)	237AA/100/675x40B		10
	A160 (P120)	237AA/160/675x40B		10



Trizact™ is a registered trademark of the 3M Company.

> Cloth belts

337DC - TRIZACT™

dimensions	grit	code	stock	
675x40	A45 (P400)	337DC/45/675x40B	●	10
	A65 (P280)	337DC/65/675x40B	●	10
	A100 (P220)	337DC/100/675x40B	●	10
	A160 (P120)	337DC/160/675x40B	●	10
	A300 (P80)	337DC/300/675x40B	●	10



> Reinforced Tex-belts

RC

dimensions	grit	code	stock	
675x40	CO	VT/RC1/675x40TB	●	10
	ME	VT/RC2/675x40TB	●	10
	VF	VT/RC3/675x40TB	●	10



T00

dimensions	grit	code	stock	
675x40	T00	VT/T00/675x40TB	●	10





➤ **Finit-Easy, no corner is safe any more!**



Accessibility is an important term in the world of abrasives. Nearly anything can be manufactured and welded, but it is not much help if the piece cannot be finished. The Finit-Easy offers you the accessibility and freedom of movement you require for a professional finish in hard-to-reach areas and corners. Finishing inside corners and removing weld seams becomes child's play with this innovative extension arm.



> THE DETAILS



UNIQUE DRIVE

The Cibo Finit-Easy has a direct connection of the arm to the drive motor. Due to this direct mounting, the connection between both parts is extremely compact and stable. The direct drive ensures the flexible and quiet working of the appliance. The device has ergonomic advantages. Due to the ingenious positioning of the arm, the device is better balanced, which improves its grip. This results in a smooth and comfortable operation.



ACCESSIBILITY

As the extension arm is connected onto the driving motor, the Finit-Easy is 40% more compact at the height of the connection, considerably increasing accessibility. At 25mm, the end of the arm is the narrowest on the market. As a result, the Finit-Easy can be used to finish acute corners up to 30°.

ADJUSTABLE PROTECTIVE COVER

The Finit-Easy has a practically continuous variable protective cover. With its handy click and sliding system, the protective cover can be moved through an angle of 90°. As a result, the cap can be optimally positioned at any given time with little effort, no matter how you twist or turn the machine. This ensures safe use in all circumstances, without the protective cap interfering with your work.



POWER AND DURABILITY


The powerful 1200 Watt drive motor has double gearing. It is a powerful motor, unstoppable even at low rpm. In order to transmit this power, a practically indestructible Multi V-belt with built-in slip clutch runs right through the extension arm. Because this drive belt will slip before the machine reaches its highest torque, it retains its ability to protect the motor and the operator. The rotation speed of the motor can be adjusted from 1300 to 4000 RPM. By adjustment of the speed of the machine to the advised RPM specified on the abrasive products, we can guarantee maximum efficiency of our abrasive material. In this way you can avoid burnt areas on the workpiece and you have maximum control of the grinding process.





STAINLESS STEEL-SAFE

The Finit-Easy extension arm is manufactured entirely from anodised aluminium. The flanges used to attach grinding products to the M14 screw thread are made from stainless steel. This makes the machine completely stainless steel-safe. There is no contamination if part of the machine comes in contact with a stainless steel workpiece.

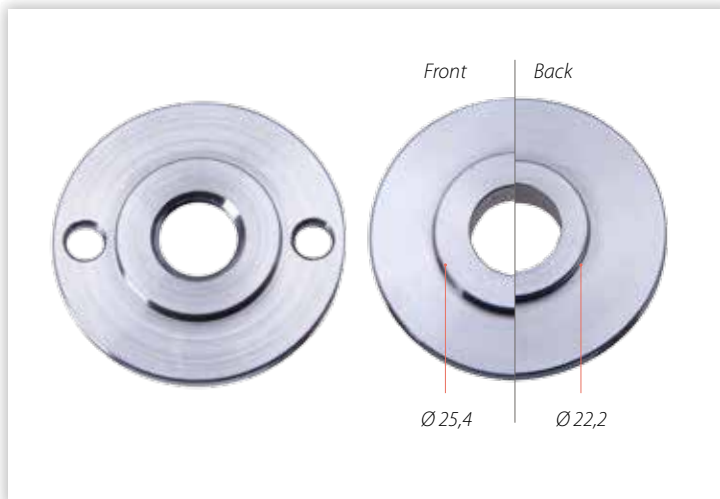

SMART FLANGES

The stainless steel flanges allow you to mount discs of varying shaft diameter and thickness effortlessly and safely on the Finit-Easy.

Stainless steel flanges: see p. 499

> Finit-Easy

FINIT-EASY



FINIT-EASY SET

code	voltage	power	RPM	stock	
SMFEFA	220V	1200W	900-2.810	●	1
SMFEFB	110V	1200W	900-2.810	●	1
SMFEBA	220V	1200W	900-2.810	●	1
SMFEBA	110V	1200W	900-2.810	●	1



SMFEFA

content	code	description	Number	
			SMFEBA	SMFEFA
–		FinPower®: 1200 Watt and Finit-Easy-arm	1	1
SA2T31		Finishing wheel Ø150 x 6 x 25,4 SA2	–	1
SA3T31		Finishing wheel Ø150 x 6 x 25,4 SA3	–	1
SA5T31		Finishing wheel Ø150 x 6 x 25,4 SA5	1	1
SA6T31		Finishing wheel Ø150 x 6 x 25,4 SA6	1	1
SA7T31		Finishing wheel Ø150 x 6 x 25,4 SA7	1	1
SA8T31		Finishing wheel Ø150 x 6 x 25,4 SA8	–	1
SA7T30		Finishing wheel Ø150 x 3 x 25,4 SA7	1	1
SA8T30		Finishing wheel Ø150 x 3 x 25,4 SA8	1	1
T9/A6/4H26		Finishing wheel Ø150 x 4,2 x 25,4	–	1
MHV5600/T31		Felt disc Ø150 x 5 x 25,4	1	1
PV102		High gloss polishing paste - pink	1	1
RCD/ME/125		RCD-disc Ø125x22 Medium	1	1
SAG/5/125		SA-disc on glass fibre SA5 Ø125 x 22	1	1
FORU/60		Rubber-bonded sanding block grit type 60	–	1
SPIC		Inoxiclean spray can	–	1
SV19030		Abrasive file 190 x 30mm	1	1
706GR/24/V006		Grip sheet 190 x 30 mm Grit type 24	6	6
FMGRT/AF/60040		Tex open belt 600 x 40 mm AF	2	2

+ delivered in a sturdy box

+ socket wrench 4 mm and 6 mm + spanner



● = available from stock

● = available in 5 working days

● = on request

➤ Finishing wheels

CONVOLUTE WHEELS SA



diameter	width	center hole	density	code	stock	
Ø 150	6	Ø 25,4	SA1	SA1T31	●	6
	6	Ø 25,4	SA2	SA2T31	●	6
	6	Ø 25,4	SA3	SA3T31	●	6

For additional information : see p. 347

UNITIZED WHEELS SA



diameter	width	center hole	density	code	advised RPM	max RPM	stock	
Ø 150	3	Ø 25,4	SA7	SA7T30	3.000	6.000	●	6
	3	Ø 25,4	SA8	SA8T30	3.000	6.000	●	6
	4,2	Ø 25,4	A6	T9/A6/4H26	5.500	8.000	●	6
	4,2	Ø 25,4	Z7	T9/Z7/4H26	5.500	8.000	●	6
	6	Ø 25,4	SA5	SA5T31	3.000	6.000	●	6
	6	Ø 25,4	SA6	SA6T31	3.000	6.000	●	6
	6	Ø 25,4	SA7	SA7T31	3.000	6.000	●	6
	6	Ø 25,4	SA8	SA8T31	3.000	6.000	●	6
	6	Ø 25,4	A6	T9/A6/6H26	5.500	8.000	●	4
	6	Ø 25,4	Z7	T9/Z7/6H26	5.500	8.000	●	4

For additional information : see p. 348

➤ Felt wheels

FELT



diameter	width	center hole	code	stock	
Ø 150	5	Ø 25,4	MHV5600/T31	●	6



➤ **Abrasive file with velcro backing**

ABRASIVE FILE

dimensions	code	stock	
190x30	SV19030	●	1

➤ **Paper grip sheets for abrasive file**

SP706F

dimensions	code	stock	
190x30	706GR/24/V006	●	25



● = available from stock

● = available in 5 working days

● = on request



➤ **Finimaster Pro, the mobile workshop.**

This powerful machine with an extremely high torque ensures amazing power transmission.
The adjustable speed guarantees comfort and is user-friendly.
The ingeniously placed handle ensures 100% controllable working pressure.

The result is an uniform and flawless finish in less time and using less material on sheet material as well as on round and square tubes.

Regardless of whether we are dealing with satinising, structuring, homogenising, brushing, roughing, cleaning, polishing, ... the Finimaster combines high user-friendliness with a finish similar to that of a stationary machine. The Finimaster's great zest for work can be seen in the wide variety of brushes, belts and finishing and grinding wheels that can be used on this machine.



> THE DETAILS**APPLICATIONS**

Satinising, structuring, homogenising, brushing, roughing, cleaning, polishing, etc. of stainless steel, aluminium, brass, copper, plastic, wood and much more.





PROPERTIES

- Double toothed gear transmission that provides an extremely high torque, resulting in amazing power transmission.
- VTC-electronics steering guarantees a constant revolution speed. It monitors the winding temperature, even under heavy loads, and includes electronic safety restart.
- Continuously adjustable speed control from 900 to 2810 RPM for optimal use of the grinding products.
- Patented powder coating provides additional protection of the motor against dust (up 50% longer lifespan).
- Powerful 1200 Watt motor
- Double bearing
- The handle is placed directly above the grinding wheel for perfect control of the workpiece.
- Solid, easily adjustable protective cap.
- Each set is delivered with a sturdy toolbox.

BENEFITS

- Uniform & flawless finish
- Faster grinding, quicker results
- Perfect control of workpiece
- Suited for working sheet material as well as round and square tubes
- It is also possible to grind right into corners
- Grinding from practically any position thanks to the ingeniously adjustable protective cap.
- Faster change of materials thanks to the handy attachment system M14
- Cooler grinding
- Up 220% more grinding material

> Finimaster Pro

FINIMASTER PRO



FINIMASTER PRO SET

code	voltage	power	description	RPM	stock	
FMC	220V	1200W	Finimaster Pro set	900-2.810	●	1
FMCIPRS1	220V	1200W	Finimaster Pro set 1	900-2.810	●	1
FMCIPRS2	220V	1200W	Finimaster Pro set 2	900-2.810	●	1
FMCIPRS1/110	110V	1200W	Finimaster Pro set 1 (110V)	900-2.810	●	1
FMCIPRS2/110	110V	1200W	Finimaster Pro set 2 (110V)	900-2.810	●	1

content	code	description	Number	
			FMCIPRS1	FMCIPRS2
	FMC	Finimaster machine	1	1
	FMTM/80/120110	Tex wheel Ø120 x 110 mm grit 80	1	1
	FMCM/80/120110	Combi wheel Ø120 x 110 mm grit 80	–	1
	FMSBM1	Drive wheel for abrasive belts	1	1
	FMNUM	Inflatable wheel Ø120 x 100 mm	1	1
	VT/FE1/395X100	Reinforced Tex sleeve Ø120 x 100 mm Coarse	1	1
	VT/FE2/395X100	Reinforced Tex sleeve Ø120 x 100 mm Medium	2	2
	VT/FE3/395X100	Reinforced Tex sleeve Ø120 x 100 mm Very Fine	1	1
	TZ59/40/385x100	Abrasive sleeve Ø120 x 100mm grit type 40	1	1
	TZ59/80/385X100	Abrasive sleeve Ø120 x 100mm grit type 80	1	1
	TZ59/120/385X100	Abrasive sleeve Ø120 x 100mm grit type 120	1	1
	337DC/300/385X100	Trizact™ sleeve Ø120 x 100 mm grit type 300 (= grit type P80)	2	2
	JF4T/80/675X40	Abrasive belt 675 x 40mm grit type 80	1	1
	JF4T/120/675X40	Abrasive belt 675 x 40mm grit type 120	1	1
	FMGRT/AF/60040	Tex open belt 600x40 mm AF	2	2
	FMGRT/SUF/60040	Tex open belt 600x40 mm SUF	2	2
	FMGRSL50030	Grip lock (velcro fastner) 500 x 30 mm	1	1
	FORU/60	Rubber-bonded sanding block grit type 60	–	1
	SPIC	Inoxiclean spray can	–	1
	MHIT	Inoxitape	–	1



FMCIPRS2

+ delivered in a sturdy box
+ spanner 17mm + pump

Trizact™ is a registered trademark of the 3M Company.

➤ **Tex flap wheels**

FMTM						
diameter	width	grit	code	attach- ment	stock	
Ø 120	50	80	FMTM/80/12050	M14	●	1
	50	180	FMTM/180/12050	M14	●	1
	50	280	FMTM/280/12050	M14	●	1
	50	400	FMTM/400/12050	M14	●	1
	50	600	FMTM/600/12050	M14	●	1
	50	CP	FMTM/CP/12050	M14	●	1
	110	80	FMTM/80/120110	M14	●	1
	110	180	FMTM/180/120110	M14	●	1
	110	280	FMTM/280/120110	M14	●	1
	110	400	FMTM/400/120110	M14	●	1
	110	600	FMTM/600/120110	M14	●	1
	110	CP	FMTM/CP/120110	M14	●	1



● = available from stock ● = available in 5 working days ● = on request



> Combination flap wheels

FMCM

diameter	width	attach- ment	grit	code	stock	
Ø 120	50	M14	80	FMCM/80/12050	●	1
	50	M14	180	FMCM/180/12050	●	1
	110	M14	80	FMCM/80/120110	●	1
	110	M14	180	FMCM/180/120110	●	1



> Ceramic wheels

WITH CENTER HOLE / M14

diameter	width	attach- ment	grit	code	max RPM	stock	
Ø 120	50	M14	60	FMCMC/60/12050	4.200	●	1
	110	M14	60	FMCMC/60/120110	4.200	●	1



> Cotton polishing wheels

FMPM - SUM

diameter	width	attach- ment	type	code	stock	
Ø 125	110	M14	White cotton	FMPM125110	●	1
	50	M14	White cotton	SUM12550	●	1



> Flannel polishing wheels

FLM

diameter	width	attach- ment	type	code	stock	
Ø 125	50	M14	Flannel	FLM12550	●	1

➤ Cloth sleeves for inflatable wheels (Ø120)

TZ59 - ZIRC.

dimensions	grit	code	stock	
385x100	40	TZ59/40/385x100B	●	10
	60	TZ59/60/385x100B	●	10
	80	TZ59/80/385x100B	●	10
	100	TZ59/100/385x100B	●	10
	120	TZ59/120/385x100B	●	10



237AA - TRIZACT™

dimensions	grit	code	stock	
385x100	A160 (P120)	237AA/160/385x100B	●	10
	A100 (P220)	237AA/100/385x100B	●	10
	A80 (P240)	237AA/80/385x100B	●	10
	A65 (P280)	237AA/65/385x100B	●	10
	A45 (P400)	237AA/45/385x100B	●	10
	A30 (P600)	237AA/30/385x100B	●	10
	A16 (P1400)	237AA/16/385x100B	●	10
	A6 (P2000)	237AA/6/385x100B	●	10



Trizact™ is a registered trademark of the 3M Company.

> Cloth sleeves for inflatable wheels (Ø120)

337DC - TRIZACT™



dimensions	grit	code	stock	
385x100	A300 (P80)	337DC/300/385x100B	●	10
	A160 (P120)	337DC/160/385x100B	●	10
	A100 (P220)	337DC/100/385x100B	●	10
	A65 (P280)	337DC/65/385x100B	●	10
	A45 (P400)	337DC/45/385x100B	●	10

> Surface conditioning sleeves for inflatable wheels (Ø120)

FE



dimensions	grit	code	stock	
395x100	CO	VT/FE1/395x100TB	●	10
	ME	VT/FE2/395x100TB	●	10
	VF	VT/FE3/395x100TB	●	10

> Cloth belts

TJ7 - OPEN BELTS WITH GRIP LOCK



dimensions	grit	grit type	code	stock	
600x40	60	A/O	FMGRL/60/60040	●	10
	80	A/O	FMGRL/80/60040	●	10
	100	A/O	FMGRL/100/60040	●	10
	120	A/O	FMGRL/120/60040	●	10
	220	A/O	FMGRL/220/60040	●	10
	320	A/O	FMGRL/320/60040	●	10

> Tex belts

OPEN BELTS WITH GRIP LOCK



dimensions	grit	grit type	code	stock	
600x40	AF	A/O	FMGRT/AF/60040	●	10
	SUF600	S/C	FMGRT/SUF/60040	●	10

➤ Abrasive belt drive - without flanges

FMSB					
diameter	width	attachment	code	stock	
Ø 60	100	M14	FMSBM1	●	1



➤ FM Keyway conversion spindle

ADAPTER KEYWAY CONVERSION SPINDLE					
length	attachment	code		stock	
100	M14	FM AS+SPIE			1



➤ InoxiClean spray

SPIC				
Volume	code			stock 
400ml	SPIC			● 3



➤ Inoxitape

MHIT					
length	width	thickness	code	stock	
5000	40	0,15	MHIT	●	1



➤ Inflatable wheels

FMNUM					
diameter	width	attachment	code	stock	
Ø 120	100	M14	FMNUM	●	1

replacement rubber : see p. 484



> **Finimaster**

FINIMASTER



FINIMASTER BASIC

Applications: Satinising, structuring, homogenising, brushing, roughing, cleaning, polishing, etc. of stainless steel, aluminium, brass, copper, plastic, wood and much more.

code	voltage	power	description		stock	
FMBA	220V	1200W	Finimaster basic	900-2.810		1
FMBASET1	220V	1200W	Finimaster basic set 1	900-2.810		1
FMBASET2	220V	1200W	Finimaster basic set 2	900-2.810		1
FMBASET1/110	110V	1200W	Finimaster basic set 1 (110V)	900-2.810		1
FMBASET2/110	110V	1200W	Finimaster basic set 2 (110V)	900-2.810		1



FINIMASTER BASIC SET

content	code	description	Number	
			FMBASET1	FMBASET2
	FMBA	Finimaster Basic machine	1	1
	FMTA/80/100100	Tex wheel Ø100 x 100 mm grit type 80	1	1
	FMCA/80/100100	Combined wheel Ø100 x 100 mm grit type 80	–	1
	FMSB1	Drive wheel for abrasive belts	1	1
	FMNU374	Inflatable wheel Ø90 x 100 mm	1	1
	FMVT/FE1/305X100	Reinforced Tex sleeve Ø90 x 100 mm Coarse	1	1
	FMVT/FE2/305X100	Reinforced Tex sleeve Ø90 x 100 mm Medium	2	2
	FMVT/FE3/305X100	Reinforced Tex sleeve Ø90 x 100 mm Very Fine	1	1
	FMTZ59/40/293X100	Abrasive sleeve Ø90 x 100mm grit type 40	1	1
	FMTZ59/80/293X100	Abrasive sleeve Ø90 x 100mm grit type 80	1	1
	FMTZ59/120/293X100	Abrasive sleeve Ø90 x 100mm grit type 120	1	1
	337DC/300/293X100	Trizact™ sleeve Ø90 x 100mm grit type 300 (= grit type P80)	1	1
	JF4T/80/675X40	Abrasive belt 675 x 40mm grit type 80	1	1
	JF4T/120/675X40	Abrasive belt 675 x 40mm grit type 120	1	1
	FMGRT/AF/60040	Tex open belt 600x40 mm AF	2	2
	FMGRT/SUF/60040	Tex open belt 600x40 mm SUF	2	2
	FMGRSL50030	Grip lock (velcro fastner) 500 x 30 mm	1	1
	FORU/60	Rubber-bonded sanding block grit type 60	–	1
	SPIC	Inoxiclean spray can	–	1
	MHIT	Inoxitape	–	1

+ delivered in a sturdy box
+ spanner 17mm + pump

Trizact™ is a registered trademark of the 3M Company.



>

Cloth flap wheels



FMLA						
diameter	width	grit	code	center hole	stock	
Ø 100	100	24	FMLA/24/100100	Ø 19,6	●	1
	100	40	FMLA/40/100100	Ø 19,6	●	1
	100	60	FMLA/60/100100	Ø 19,6	●	1
	100	80	FMLA/80/100100	Ø 19,6	●	1
	100	120	FMLA/120/100100	Ø 19,6	●	1
	100	180	FMLA/180/100100	Ø 19,6	●	1
	100	240	FMLA/240/100100	Ø 19,6	●	1
	100	320	FMLA/320/100100	Ø 19,6	●	1
	50	24	FMLA/24/10050	Ø 19,6	●	2
	50	40	FMLA/40/10050	Ø 19,6	●	2
	50	60	FMLA/60/10050	Ø 19,6	●	2
	50	80	FMLA/80/10050	Ø 19,6	●	2
	50	120	FMLA/120/10050	Ø 19,6	●	2
	50	180	FMLA/180/10050	Ø 19,6	●	2
	50	240	FMLA/240/10050	Ø 19,6	●	2
	50	320	FMLA/320/10050	Ø 19,6	●	2

➤ **Tex flap wheels**

FMTA						
diameter	width	grit	code	center hole	stock	
Ø 100	100	80	FMTA/80/100100	Ø 19,6	●	1
	100	180	FMTA/180/100100	Ø 19,6	●	1
	100	280	FMTA/280/100100	Ø 19,6	●	1
	100	400	FMTA/400/100100	Ø 19,6	●	1
	100	600	FMTA/600/100100	Ø 19,6	●	1
	100	CP	FMTA/CP/100100	Ø 19,6	●	1
	50	80	FMTA/80/10050	Ø 19,6	●	2
	50	180	FMTA/180/10050	Ø 19,6	●	2
	50	280	FMTA/280/10050	Ø 19,6	●	2
	50	400	FMTA/400/10050	Ø 19,6	●	2
	50	600	FMTA/600/10050	Ø 19,6	●	2
	50	CP	FMTA/CP/10050	Ø 19,6	●	2



➤ **CSD-wheels**

FMCS						
diameter	width	grit	code	center hole	stock	
Ø 100	100	CSD	FMCS100100	Ø 19,6	●	1



➤ **Combination flap wheels**

FMCA						
diameter	width	grit	code	center hole	stock	
Ø 100	100	80	FMCA/80/100100	Ø 19,6	●	1
	100	180	FMCA/180/100100	Ø 19,6	●	1
	50	80	FMCA/80/10050	Ø 19,6	●	2
	50	180	FMCA/180/10050	Ø 19,6	●	2





> Ceramic wheels

WITH CENTER HOLE

diameter	width	grit	code	center hole	max RPM	stock	
Ø 100	50	60	FMCAC/60/10050	Ø 19,6	5.700	●	2
	100	60	FMCAC/60/100100	Ø 19,6	5.700	●	1

> Polishing wheels for Finimaster and other satinising machines

SISAL

diameter	width	grit	code	center hole	stock	
Ø 100	100	Sisal	FMSS100100	Ø 19,6	●	1

COTTON

diameter	width	grit	code	center hole	stock	
Ø 100	100	White cotton	FMPR100100	Ø 19,6	●	1
	12	White cotton	FMPR10012	Ø 19,6	●	8

FELT

diameter	width	grit	code	center hole	stock	
Ø 100	50	Felt	FMVR10050	Ø 19,6	●	2

> Cloth sleeves for inflatable wheels (Ø90)

TZ59 - ZIRC.

dimensions	grit	code	stock	
293x100	40	FMTZ59/40/293x100	●	10
	60	FMTZ59/60/293x100	●	10
	80	FMTZ59/80/293x100	●	10
	100	FMTZ59/100/293x100	●	10
	120	FMTZ59/120/293x100	●	10



➤ Cloth sleeves for inflatable wheels (Ø90)

237AA - TRIZACT™

dimensions	grit	code	stock	
293x100	A160 (P120)	237AA/160/293x100B	●	10
	A100 (P220)	237AA/100/293x100B	●	10
	A80 (P240)	237AA/80/293x100B	●	10
	A65 (P280)	237AA/65/293x100B	●	10
	A45 (P400)	237AA/45/293x100B	●	10
	A30 (P600)	237AA/30/293x100B	●	10
	A16 (P1400)	237AA/16/293x100B	●	10
	A6 (P2000)	237AA/6/293x100B	●	10



337DC - TRIZACT™

dimensions	grit	code	stock	
293x100	A300 (P80)	337DC/300/293x100B	●	10
	A160 (P120)	337DC/160/293x100B	●	10
	A100 (P220)	337DC/100/293x100B	●	10
	A65 (P280)	337DC/65/293x100B	●	10
	A45 (P400)	337DC/45/293x100B	●	10



Trizact™ is a registered trademark of the 3M Company.

➤ Surface conditioning sleeves for inflatable wheels (Ø90)

FE

dimensions	grit	code	stock	
305x100	CO	FMVT/FE1/305x100	●	10
	ME	FMVT/FE2/305x100	●	10
	VF	FMVT/FE3/305x100	●	10



> Cloth belts

TJ7 - OPEN BELTS WITH GRIP LOCK



dimensions	grit	type of grit	code	stock	
600x40	60	A/O	FMGRL/60/60040	●	10
	80	A/O	FMGRL/80/60040	●	10
	100	A/O	FMGRL/100/60040	●	10
	120	A/O	FMGRL/120/60040	●	10
	220	A/O	FMGRL/220/60040	●	10
	320	A/O	FMGRL/320/60040	●	10

> Tex belts

OPEN BELTS WITH GRIP LOCK



dimensions	grit	type of grit	code	stock	
600x40	AF	A/O	FMGRT/AF/60040	●	10
	SUF600	S/C	FMGRT/SUF/60040	●	10

Trizact™ is a registered trademark of the 3M Company.

> Abrasive belt drive – with flanges

FMSB



diameter	width	code	stock	
Ø 60	100	FMSB2	●	1

> Abrasive belt drive - without flanges

FMSB



diameter	width	code	stock	
Ø 60	100	FMSB1	●	1

➤ **FM Keyway conversion spindle**

ADAPTER KEYWAY CONVERSION SPINDLE

length	attachment	code	stock	
100	M14	FM AS+SPIE	●	1



➤ **Inoxitape**

MHIT

length	width	thickness	code	stock	
5000	40	0,15	MHIT	●	1



➤ **Inflatable wheels**

FMNU

diameter	width	max RPM	code	centre hole	stock	
Ø 90	100	3.200	FMNU374	Ø 19,6	●	1



➤ **Ventilated wheels**

FMRU

diameter	width	code	centre hole	stock	
Ø 90	100	FMRU	Ø 19,6	●	1

replacement rubber : see p. 468



> **Finipower**

FINIPOWER



FINIPOWER

Properties:

- Motor protected against dust
- Continuously adjustable rpm
- Protection against overload
- Spindle lock
- Double-toothed gear transmission

code	voltage	power	RPM	stock	
SMFP	220V	1200W	900-2.810	●	1
SMMS6A	220V	1200W	2.000-6.500	●	1

> **Inline grinder**

LINEAR GRINDER



INLINE GRINDER

Properties & accessories :

- Linear grinding machine 500 Watt
- Standard delivery with a grinding arm and grip sole

code	voltage	power	RPM	stock	
SMFLSA	220V	500W	2.300-5.200	●	1

STRAIGHT ARM FOR INLINE GRINDER



code

stock



SMSU908957



1

POINTED ARM FOR INLINE GRINDER



code

stock



SMSU908958



1



● = available from stock

● = available in 5 working days

● = on request

> Polishing mills

POLISHING MILL



POLISHING MILL LC 180 (INCLUDING BASE)

Properties: Cibo polishing mills are equipped with extra long attachment arms allowing you to mount polishing materials and brushes of various widths. In addition, Cibo offers a wide variety of reducing flanges, so that brushes and polishing materials with various shafts can be attached to the mounting shaft.

Version : • Including base • 2 fixed protective covers Ø 400 mm with dust suction capability • Thermal safety • Emergency stop

code	voltage	power	RPM	shaft length	diameter	stock	
SMLC18022M	220V mono	1800W	1400	210mm	Ø 30	●	1
SMLC18022T	220V tri	1800W	1.400-2.800	210mm	Ø 30	●	1
SMLC18038T	380V tri	1800W	1.400-2.800	210mm	Ø 30	●	1

POLISHING MILL



POLISHING MILL LC 300 (INCLUDING BASE)

Properties: Cibo polishing mills are equipped with extra long attachment arms allowing you to mount polishing materials and brushes of various widths. In addition, Cibo offers a wide variety of reducing flanges, so that brushes and polishing materials with various shafts can be attached to the mounting shaft.

Version : • Including base • 2 fixed protective covers Ø 400 mm with dust suction capability • Thermal safety • Emergency stop

code	voltage	power	RPM	shaft length	diameter	stock	
SMLC30022T	220V tri	3800W	700-1.400	210mm	Ø 30	●	1
SMLC30038T	380V tri	3800W	700-1.400	210mm	Ø 30	●	1



> **Finiflex**

BASIC SET

Properties: Ready for use. This machine consists of a drive motor, an industrial flexible shaft and a straight handle.

code	description	stock	
SMFN15CO	Set SMFN15 + SMFNA10 + SMFNRH10	●	1

> **Basic motor**

BASIC MOTOR

Properties:

- Strong, reliable induction motor of 1,500 Watt
- Can be used for all milling, grinding and polishing operations
- Variable settings from 500 to 15,000 RPM
- Maintains RPM despite load
- Can be used with different flexible shafts

code	description	stock	
SMFN15	Finiflex Master motor 1500 W (500 - 15.000 TPM)	●	1

> **Flexible shafts**

FLEXIBLE SHAFTS

code	description	stock	
SMFNA7	Flexible shaft Ø 7 mm x 1,5 m DIN 10/G 22	●	1
SMFNA10	Flexible shaft Ø 10 mm x 2 m DIN 10/G 28	●	1
SMFNA12	Flexible shaft Ø 12 mm x 2 m DIN 10/G 28	●	1

> **Handles**

HANDLES FOR SMFNA10

code	description	stock	
SMFNRH10	Straight handle for flexible shaft SMFNA10	●	1
SMFNHH10	Angle handle 90° for flexible shaft SMFNA10	●	1
SMFNHH10/45	Angle handle 45° for flexible shaft SMFNA10	●	1

● = available from stock ● = available in 5 working days ● = on request

FINIFLEX



Handles

HANDLES FOR SMFNA7

code	description	stock	
SMFNRH7	Straight handle for flexible shaft SMFNA7	●	1
SMFNHH7	Angle handle 90° for flexible shaft SMFNA7	●	1
SMFNHH7/45	Angle handle 45° for flexible shaft SMFNA7	●	1

HANDLES FOR SMFNA12

code	description	stock	
SMFNRH12	Straight handle for flexible shaft SMFNA12	●	1

Алматы (727)345-47-04
 Ангарск (3955)60-70-56
 Архангельск (8182)63-90-72
 Астрахань (8512)99-46-04
 Барнаул (3852)73-04-60
 Белгород (4722)40-23-64
 Благовещенск (4162)22-76-07
 Брянск (4832)59-03-52
 Владивосток (423)249-28-31
 Владикавказ (8672)28-90-48
 Владимир (4922)49-43-18
 Волгоград (844)278-03-48
 Вологда (8172)26-41-59
 Воронеж (473)204-51-73
 Екатеринбург (343)384-55-89

Иваново (4932)77-34-06
 Ижевск (3412)26-03-58
 Иркутск (395)279-98-46
 Казань (843)206-01-48
 Калининград (4012)72-03-81
 Калуга (4842)92-23-67
 Кемерово (3842)65-04-62
 Киров (8332)68-02-04
 Коломна (4966)23-41-49
 Кострома (4942)77-07-48
 Краснодар (861)203-40-90
 Красноярск (391)204-63-61
 Курск (4712)77-13-04
 Курган (3522)50-90-47
 Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13
 Москва (495)268-04-70
 Мурманск (8152)59-64-93
 Набережные Челны (8552)20-53-41
 Нижний Новгород (831)429-08-12
 Новокузнецк (3843)20-46-81
 Ноябрьск (3496)41-32-12
 Новосибирск (383)227-86-73
 Омск (3812)21-46-40
 Орел (4862)44-53-42
 Оренбург (3532)37-68-04
 Пенза (8412)22-31-16
 Петрозаводск (8142)55-98-37
 Псков (8112)59-10-37
 Пермь (342)205-81-47

Ростов-на-Дону (863)308-18-15
 Рязань (4912)46-61-64
 Самара (846)206-03-16
 Санкт-Петербург (812)309-46-40
 Саратов (845)249-38-78
 Севастополь (8692)22-31-93
 Саранск (8342)22-96-24
 Симферополь (3652)67-13-56
 Смоленск (4812)29-41-54
 Сочи (862)225-72-31
 Ставрополь (8652)20-65-13
 Сургут (3462)77-98-35
 Сыктывкар (8212)25-95-17
 Тамбов (4752)50-40-97
 Тверь (4822)63-31-35

Тольятти (8482)63-91-07
 Томск (3822)98-41-53
 Тула (4872)33-79-87
 Тюмень (3452)66-21-18
 Ульяновск (8422)24-23-59
 Улан-Удэ (3012)59-97-51
 Уфа (347)229-48-12
 Хабаровск (4212)92-98-04
 Чебоксары (8352)28-53-07
 Челябинск (351)202-03-61
 Череповец (8202)49-02-64
 Чита (3022)38-34-83
 Якутск (4112)23-90-97
 Ярославль (4852)69-52-93

Россия +7(495)268-04-70 Казахстан +7(727)345-47-04 Беларусь +(375)257-127-884 Узбекистан +998(71)205-18-59 Киргизия +996(312)96-26-47